



Construction

**Over-The-Fifth-Wheel
Live Bottom Trailer**



"OVER-THE-FIFTH-WHEEL" LIVE BOTTOM



"Over-The-Fifth-Wheel" Live Bottom



Locking Tailgate,
(standard).



Optional lift package available
for locking tailgate.



Concrete Modification Kit,
(optional) for handling low-slump
concrete. Includes a heavy-duty
endgate with air-powered cylinder.



Document Holder,
and easy access for
inspecting chain and belt.



Crank-n-Go Tarps,
(optional) are available with
a manual or electric drive.



**Two-Speed Crank-Up
Landing Legs,**
(optional).



Electric Cab Control,
(standard) with rear over-ride.

Built to Last – a proven, reliable, and low maintenance performer, Trail King's "Over-The-Fifth-Wheel" Live Bottom Construction Trailer features a patented synchronized drive system with a heavy duty self-oiled roller chain system. Rubber flashing and a belt scraper keep the system clean as the load is carried toward the rear on a continuous rubber belt. Updated in 1993, this system has had tremendous success with no reported failures in over a decade.

Building a Better Bottom Line!



Specialized Trailers,
customized for your specific
needs and state requirements.

Insulation and siding packages
are also available (pictured on front).

Exceptional hauling versatility – asphalt and asphalt-related materials – one trailer serves many needs.

Clean and efficient horizontal discharge in one revolution or less makes unloading easy and reduces cycle time.

Innovative over-the-fifth-wheel body distributes weight over the entire length of the tractor and trailer, including the steer axle, for maximum payloads within legal limits. Coupled with short wheelbase tractors, these combinations can be highly maneuverable.

Construction Trailer



Live Bottom Features Include:



Sloped walls (60°) reduce segregation of loads during transport and eliminate bridging problems. 96" hopper width standard (102" option).

Continuous Belt of heat- and oil-resistant two-ply rubber moves the entire load to the rear for discharge.



The 36-inch belt is attached to steel slats and moved by double pitch roller chain on steel tracks.



Proprietary Roller Chain with self-lubricating chain oiler system.



Direct Hydrostatic Drive with double-reduction planetary gearbox eliminates the problems associated with chain drives.



Air-Ride Suspension, (optional) also available with air-lift axles. Three-leaf suspension is standard.



Release Agent Spray System, (optional)

1-800-762-5557




"Over-The-Fifth-Wheel" Live Bottom


1-800-762-5557




Model OLB336

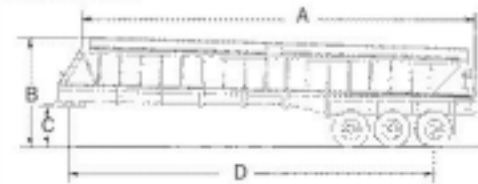


Model OLB332

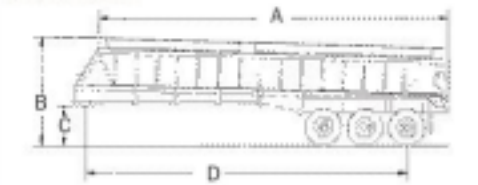

Model OLB326

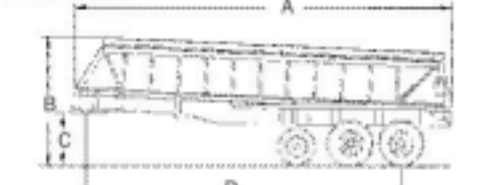

Model OLB426

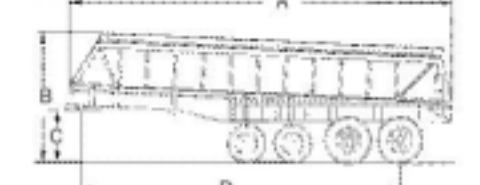

- **Exceptional hauling versatility.**
Designed to haul asphalt and asphalt-related materials.
- **Fast, clean horizontal discharge** makes unloading safe and easy.
- **No worries** about overhead wires, limited clearance or uneven terrain. Live bottom horizontal rear discharge eliminates tipping concerns.

Specifications

Model	OLB236	OLB336	OLB332	OLB326	OLB426	OLB340	OLB840W*	OLB840*
Capacity	29 cu. yds.	29 cu. yds.	26 cu. yds.	22 cu. yds.	22 cu. yds.	32 cu. yds.	44 cu. yds.	44 cu. yds.
Overall length (A)	41'	41'	37'	31'	31'	45'	45'	45'
Overall height (B)	9'4"	9'4"	9'4"	9'4"	9'4"	9'4"	10'6"	11'0"
Overall width	102"	102"	102"	102"	102"	102"	102"	96"
King pin height (C)	49"	49"	49"	49"	49"	49"	49"	49"
King pin to center of last axle (D)	36'	36'	32'	26'	26'	40'	40'	40'
Number of Axles	2	3	3	3	4	3	8	8
Empty weight ±3%	14,650 lbs.	16,550 lbs.	15,790 lbs.	14,500 lbs.	15,250 lbs.	17,300 lbs.	30,600 lbs.	30,600 lbs.

Optional Features

- Tarp systems – manual and electric.
- Air lift door.
- Split rear door.
- Concrete tailgate.
- Multiple axle configurations.
- Aluminum sheeting/insulation
- Air-Ride suspensions.
- Air lift suspensions.
- Gravel service belt in lieu of heat and oil resistant.
- Flow control valve.
- 102" wide body (extra capacity).
- Pressurized 12 gal. spray system.
- Tire and wheel options.
- Paint options.

All dimensions are approximate and are subject to change without notice.

Trailers pictured may include options.

*50 ton design payload. Includes options: Insulation, (3) Lifts, (3) 218 Recco Suspensions.

Distributed by:



TRAIL KING Industries

A **Genie** Company

"OVER-THE-FIFTH-WHEEL" LIVE BOTTOM

202 8th St. W. ■ West Fargo, ND 58078 ■ 1-800-762-5557 U.S. & Canada ■ 701-282-3013 ■ Fax: 701-282-3039 ■ www.trailking.com

All rights reserved Trail King Industries, Inc. FORMTKOLB/2006-2.5