



Advantage™

**Series
Live Bottom Trailer**



**9" Lower
And Up To
2,400 Lbs.
Lighter**



Advantage™
SERIES

Advantage™

Series "Over-The-Fifth-W

Built to Last – a proven, reliable, and low maintenance performer, Trail King's Advantage Series "Over-The-Fifth-Wheel" Live Bottom Construction Trailer features a patented synchronized drive system with a heavy duty self-oiled roller chain system. Rubber flashing and a belt scraper keep the system clean as the load is carried toward the rear on a continuous rubber belt. Updated in 1993, this system has had tremendous success with no reported failures in over a decade. Building a Better Bottom Line!



Locking Tailgate,
(standard).



Optional lift package
available for locking tailgate.

**1 Ton
More Payload**
(than any of the competition)

Low And Light

The Advantage Series Live Bottom incorporates lightweight, smooth aluminum sheeting and a re-engineered frame into a new lower, lighter, more aerodynamic and fuel-efficient design. And, by lowering the overall height of the trailer and extending the hopper two feet forward, we've improved the load distribution and lowered the payload center of gravity for more load-handling stability. Other features include 36" belt width, patented floor system, and self-lubricating chain oiler system.

**9" Lower
And Up To
2,400 Lbs.
Lighter**



Flip Up Mud Flaps,
new convenient hinged design
for better paver hopper clearance.



Crank-n-Go Tarps,
(optional) are available with
a manual or electric drive.



**Two-Speed Crank-Up
Landing Legs,**
(optional).



Electric Cab Control,
(standard) with rear over-ride.

Innovative over-the-fifth-wheel body distributes weight over the entire length of the tractor and trailer, including the steer axle, for maximum payloads within legal limits. Coupled with short wheelbase tractors, these combinations can be highly maneuverable.

Exceptional hauling versatility – asphalt and asphalt-related materials – one trailer serves many needs.

heel" Live Bottom Construction Trailer



Live Bottom Features Include:



Sloped walls (60°) reduce segregation of loads during transport and eliminate bridging problems. 96" hopper width standard (102" option).

Continuous Belt of heat- and oil-resistant two-ply rubber moves the entire load to the rear for discharge.



The 36-inch belt is attached to steel slats and moved by double pitch roller chain on steel tracks.



Proprietary Roller Chain with new easy access chain oiler system.



Direct Hydrostatic Drive with double-reduction planetary gearbox eliminates the problems associated with chain drives.



Air-Ride Suspension, (optional) also available with air-lift axles. Three-leaf suspension is standard.



Release Agent Spray System, (optional)

Clean and efficient horizontal discharge in one revolution or less makes unloading easy and reduces cycle time.

Advantage™ Series "Over-The-Fifth-Wheel" Live Bottom

The Advantage Series Over-The-Fifth-Wheel construction trailer offers all of the benefits of live-bottom horizontal discharge with a lightweight, strong design.


Trail King's Advantage Series OLB trailer has weights as low as 12,300 lbs.

Enjoy the safety and convenience of fast, consistent horizontal discharge with the ultra-light Advantage Series OLB Live Bottom – from Trail King!


(Up To)
**1 Ton
More Payload**

Available in limited models in 2006.

Model OLB236NG

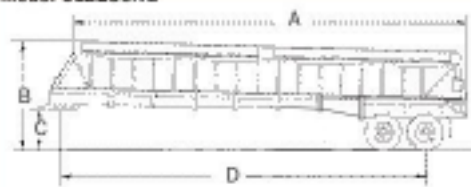


Model OLB332NG

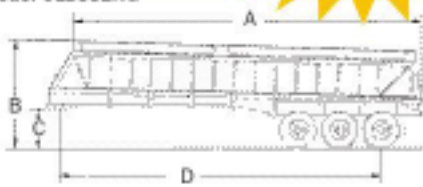

Model OLB326NG



Model OLB426NG

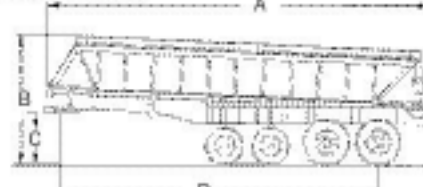

Specifications

Model	OLB236NG	OLB336NG	OLB332NG	OLB326NG	OLB426NG	OLB340NG
Capacity	29 cu. yds.	29 cu. yds.	26 cu. yds.	22 cu. yds.	22 cu. yds.	32 cu. yds.
Overall length (A)	41'	41'	37'	31'	31'	45'
Overall height (B)	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
Overall width	102"	102"	102"	102"	102"	102"
King pin height (C)	49"	49"	49"	49"	49"	49"
King pin to center of last axle (D)	36'	36'	32'	26'	26'	40'
Number of Axles	2	3	3	3	4	3
Empty weight ±3%	12,850 lbs.	14,750 lbs.	14,190 lbs.	13,300 lbs.	14,050 lbs.	15,310 lbs.

All dimensions are approximate and are subject to change without notice.
Trailers pictured may include options.

Optional Features

- Tarp systems – manual and electric.
- Air lift door.
- Split rear door.
- Concrete tailgate.
- Multiple axle configurations.
- Aluminum sheeting/insulation
- Air-Ride suspensions.
- Air lift suspensions.
- Gravel service belt in lieu of heat and oil resistant.
- Flow control valve.
- 102" wide body (extra capacity).
- Pressurized 12 gal. spray system.
- Tire and wheel options.
- Paint options.

Distributed by:



TRAIL KING Industries

Advantage

SERIES

A **Case** Company

202 8th St. W. ■ West Fargo, ND 58078 ■ 1-800-762-5557 U.S. & Canada ■ 701-282-3013 ■ Fax: 701-282-3039 ■ www.trailking.com

All rights reserved Trail King Industries, Inc. FORMTKAOLB/2006-2.5